

INSTALLATION GUIDE

AX-4




20 minutes
 Normal install time

Keep an eye out for these icons:

IMPORTANT!
 Important installation information


Helpful Hints
 Tips to assist installation

PARTS INCLUDED:

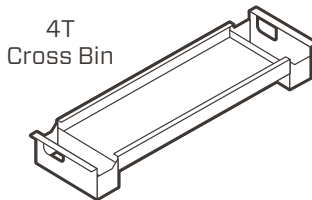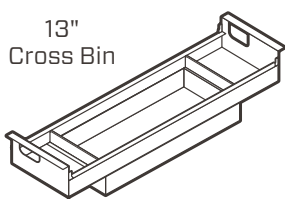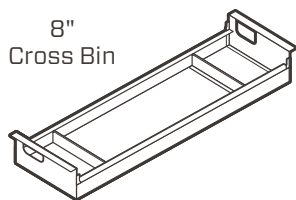


PRE-INSTALLATION NOTES:

Install your DiamondBack cover before installing the Cross Bin.

Trimming may be required if you have a plastic drop-in bed liner

HD/SE INSTRUCTIONS

- 1 Open the cab panel of the cover. Detach the bottom ends of its gas springs from their ball studs and disengage the safety catch. Fold the panel completely back until it rests on the closed portion of the cover.

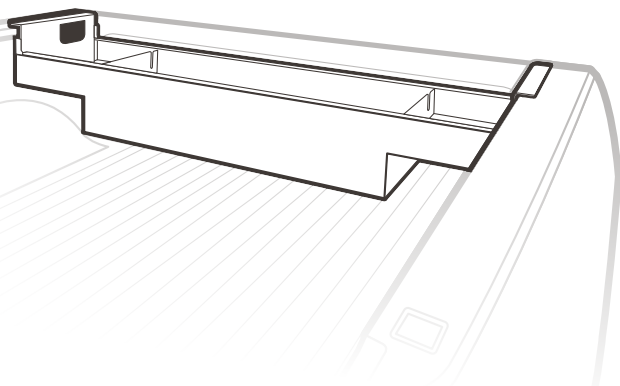


- 2 Place the Cross Bin into the truck bed so that its support flanges rest on the bed rails. Look for the word "CAB" etched into one of the longer walls of the Cross Bin and install that end closest to the cab.
- 3 Move the Cross Bin as far forward as possible, reattach gas springs and safety catch, close the cover and verify lock rod operation.

 **If you notice issues with your lock rod operation, you may need to adjust the lock rod position as referenced in your cover's installation guide. With the Cross Bin in place, you won't be able to adjust the cab-panel lock rods of your cover from inside the truck as instructed.**

 **Remember to keep the cargo in the Cross Bin clear of cab panel's safety catch to avoid interference.**

270/180 INSTRUCTIONS

- 1 For this, you will need to unclamp and remove your cover.
- 2 Place the Cross Bin into the cargo bed so that its support flanges rest on the bed rails. Look for the word "CAB" etched into one of the longer walls of the Cross Bin and install that end closest to the cab.

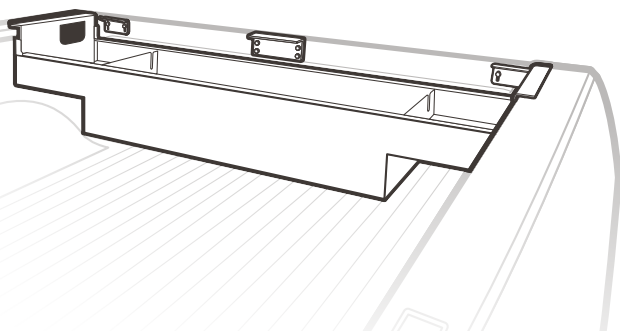

- 3 Finish installing or reinstall your DiamondBack cover.

 With the Cross Bin in place, you won't be able to attach the front clamps or adjust the cab-panel lock rods of your cover from inside the truck as instructed. You'll need to do this from the side of the truck, which will take additional time.

- 4 Move the bin as far forward as possible.

 **If you notice issues with your lock rod operation, you may need to update the lock rod position as referenced in your cover's installation guide.**